

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057117 A1

(51) International Patent Classification⁷: **E02F 9/28**

(SE). MOLIN, Niclas [SE/SE]; Vassgård 7, S-681 91 Kristinehamn (SE).

(21) International Application Number:

PCT/SE2003/002021

(74) Agent: **LUNDAHL, Kjell**; Saab Bofors Support AB, Patents and Trademarks, S-691 80 Karlskoga (SE).

(22) International Filing Date:

19 December 2003 (19.12.2003)

(25) Filing Language:

Swedish

(26) Publication Language:

English

(30) Priority Data:

0203856-0 23 December 2002 (23.12.2002) SE

(71) Applicant (for all designated States except US): **COMBI WEAR PARTS AB** [SE/SE]; Box 205, S-681 24 Kristinehamn (SE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **KARLSSON, Magnus** [SE/SE]; Tullportsgatan 7A, S-681 30 Kristinehamn

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

[Continued on next page]

(54) Title: WEARING PARTS SYSTEM FOR DETACHABLE FITTING OF WEARING PARTS FOR THE TOOL OF A CULTIVATING MACHINE

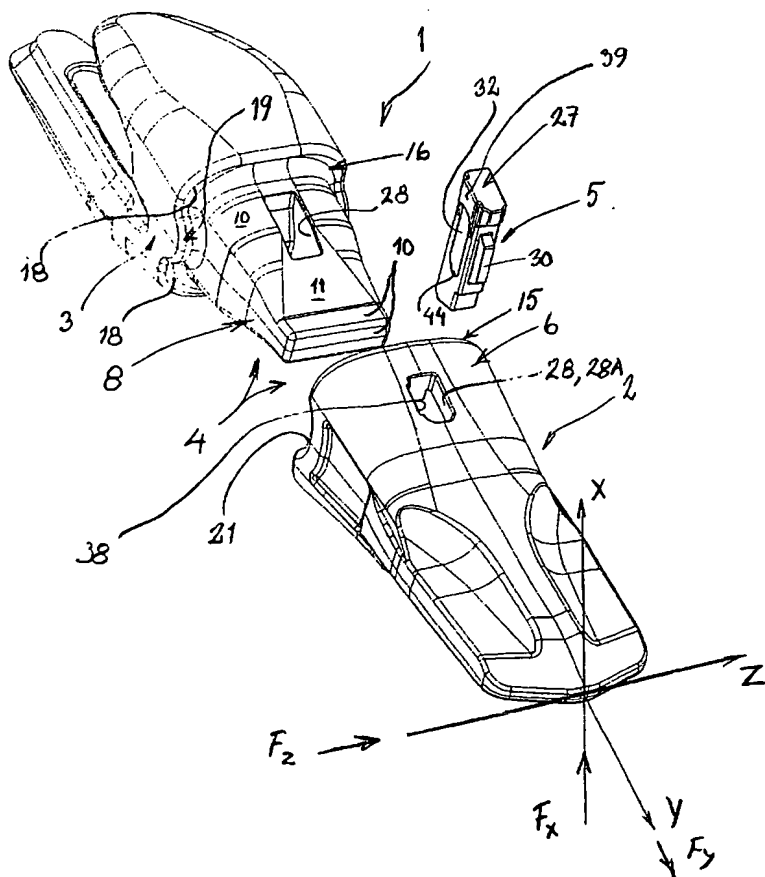

(57) Abstract: The invention relates to a wearing parts system (1) intended for the tool of a tilling machine of the type which comprises a holder part (3), having a front end part (8), and an exchangeable wearing and/or replacement part (2), arranged over this end part and comprising a hood-shaped (6) hollow (7) which, when the wearing part (2) is fitted in place, is designed to grip over the end part (8) and is fixed thereto by means of at least one locking device (27) placed through interacting openings (28), the end part (8) and the hollow (7) having front, rear and collateral contact zones (9, 22, 23), each comprising contact faces (10, 25, 26), disposed one on the holder part and one on the wearing part, for the absorption of acting vertical, horizontal and collateral forces F_x , F_y and F_z . The contact faces (25, 26) are designed to interact so as, on the one hand, to limit the pushing-on of the wearing part over the holder part and, on the other hand, to ensure that the contact between the contact faces will be made, primarily, at the common centre M_o , of the two radii (of a recess and a projection) essentially in the horizontal plane YZ and secondarily, as the wear has progressed, symmetrically about this mid contact point as an increasingly large contact zone (22', 23').

BEST AVAILABLE COPY

WO 2004/057117 A1